

DOOR MOUNTED FOR SMALL SWINGING DOORS

Medium and maximum security.

1010AM DEADLOCK

1010AM-1: KEYED ONE SIDE
1010AM-2: KEYED BOTH SIDE

APPLICATION:

For small swinging doors on
access panels, plumbing
chases, control cabinets, etc.

FUNCTION:

Mogul key activated locking and
unlocking.



DOOR MOUNTED FOR SMALL SWINGING DOORS

Medium and maximum security.

STANDARD FEATURES:

- Mechanical deadlock
- 6 pin tumblers
- Mounting fasteners

OPTIONAL FEATURES:

EXTENDED BOLT - Used for stop side mounting. Specify "1-1/4".


HOLLOW METAL MOUNTING - Used for hollow metal door application. Specify "HM." (See page G17)

MASTER KEYING AVAILABLE.

BOLT KEEPER OPTIONS -
(Must be specified separately):
4C - Bolt keeper with dustbox
4CL - Bolt keeper with switch

NOTE: All bolt keepers are supplied with security fasteners.

BOLT KEEPERS




HOW TO ORDER:

Specify:





1. Quantity
2. Swing chart number (handing)
3. Bolt projection
4. Application (HM or surface)
5. Key code instruction
6. Bolt keeper requirements

1010AM DEADLOCK

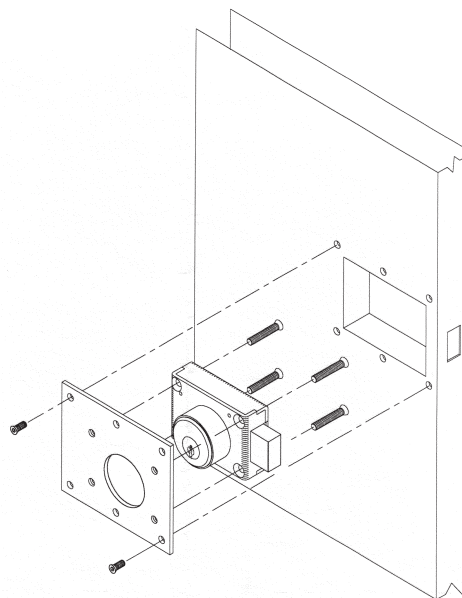

HM Mounting Shown

Swing Chart: Specify circled swing number when ordering.

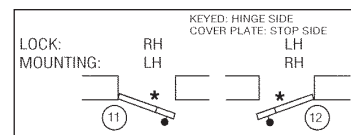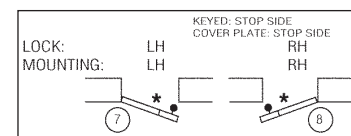

* Indicates lock mounting/access plate side.

TECHNICAL DATA:

- **STANDARD FINISH:**
Galvanized
- **COVER:** Steel
- **CASE:** Steel
- **LOCKBOLT:** Stainless Steel
- **MOGUL CYLINDER:**
US26D
- **MOGUL KEYS:**
Nickel Silver
- **PIN TUMBLERS AND ENGAGING BALLS:**
Combination nickel silver and stainless steel, 6 tumblers per lock.
- **LOCK CASE SIZE:**
4.4" L x 3.15" H x 1.35" TK
- **LOCK WEIGHT:** 5.5 lbs.
- **LOCKBOLT SIZE:**
1-1/2" H x 3/4" TK
- **LOCKBOLT THROW:** 5/8"

