


Key: Prison Paracentric
Door: Swinging
Security Level: Maximum

FOLGER ADAM MECHANICAL LOCKS

70 DEADLATCH

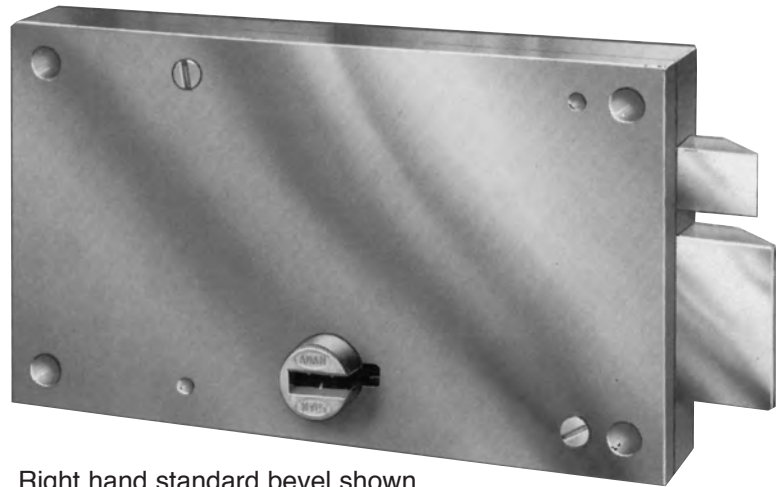

Right hand standard bevel shown.



Description

Series 70 Locks are lever tumbler mechanical locks for swinging doors. Specify keying as follows:

- 72 Keyed cover side
- 76 Keyed both sides

Applications

Series 70 Deadlatches are recommended for heavily used doors such as those in dayrooms, recreation areas or dining rooms. Convenient slam-locking. Specify handing.

Standards Compliance

UL10-B listed as Fire Door Accessory, 3-hour rating with strike.

Standard Features

- **Automatic deadlocking** – Locks when door is closed; unlocks by key.
- **Deadlock actuator** – 3/4" x 3/4" cold drawn steel with zinc plated finish.
- **Durable case** – Ductile iron case with 3/8" steel cover.
- **Corrosion-resistance** – Working parts are corrosion-resistant.
- **Heavy duty lever tumblers** – 5 spring-temper brass tumblers, activated by heavy phosphor-bronze springs. Precision fit to locking fence.

- **Large, solid latchbolt** – Zinc plated steel, 2" x 3/4" with two hardened steel roller pins to resist sawing. Bolt projects 1/2" when retracted.
- **Bolt throw** – 3/4"
- **Bolt projection** – 1/2" and 1-1/4" are standard. Specify one.
- **Investment-cast key cylinder** – One-piece bronze alloy with paracentric keyway.
- **Finish** – Zinc plated.


Optional Features

- **Mounting** – Hollow metal, grille or plate.

Accessories

(must be specified separately)

- **70-4B** – Mortise strike with mounting screws.
- **70-4BL** – Mortise strike with switch/mounting screws.
- **70-4DB** – Mortise strike with dust box and mounting screws.
- **70-4F** – Surface-mounted keeper and mounting screws.

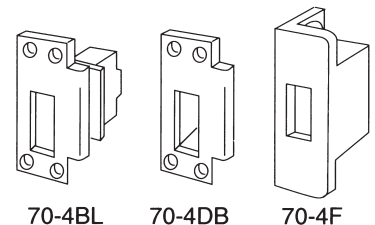

70-4BL

70-4DB

70-4F



70 DEADLATCH


How to Order

Specify:

- 1) Quantity
- 2) Handing
- 3) Bolt projection.
- 4) Mounting required.
- 5) Key code instructions.
- 6) Accessories required.

Dimensional Data

Note: Dimensions are for information and planning purposes only, and should not be used as templates.

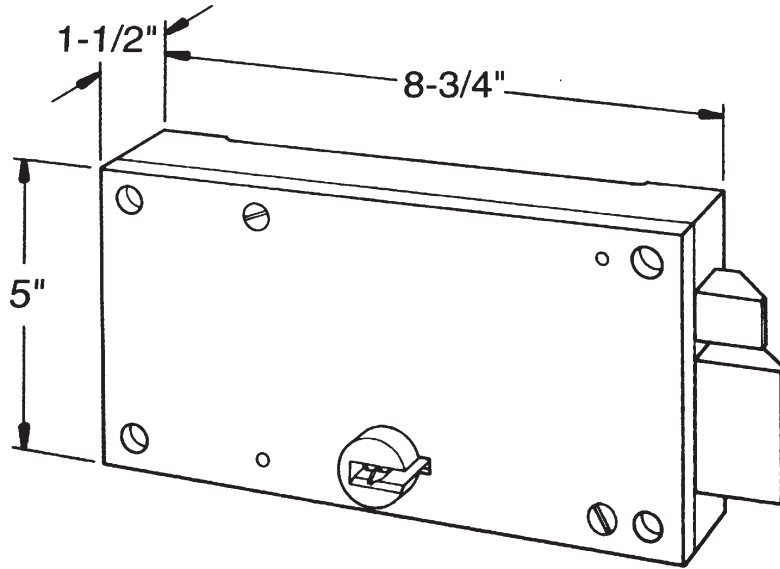

Specify circled swing number when ordering.


MOUNTING PLATE HINGE SIDE

KEYED BOTH SIDES	13	RHSB	LHSB	14
KEYED HINGE SIDE	17	RHSB	LHSB	18
KEYED STOP SIDE	21	LHRB	RHRB	22

MOUNTING PLATE STOP SIDE

KEYED BOTH SIDES	15	LHRB	RHRB	16
KEYED STOP SIDE	19	LHRB	RHRB	20
KEYED HINGE SIDE	23	RHSB	LHSB	24

LEGEND

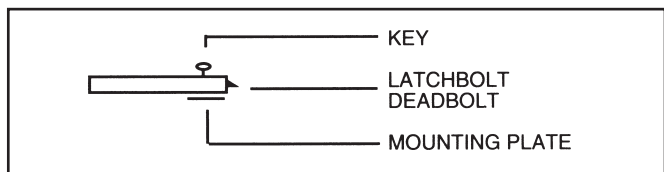

1-1/4" projection required with stop-side mounting.

