


57100

Sliding Door Hanger and Track Assemblage

For Manual Sliding Doors and Fence Gates

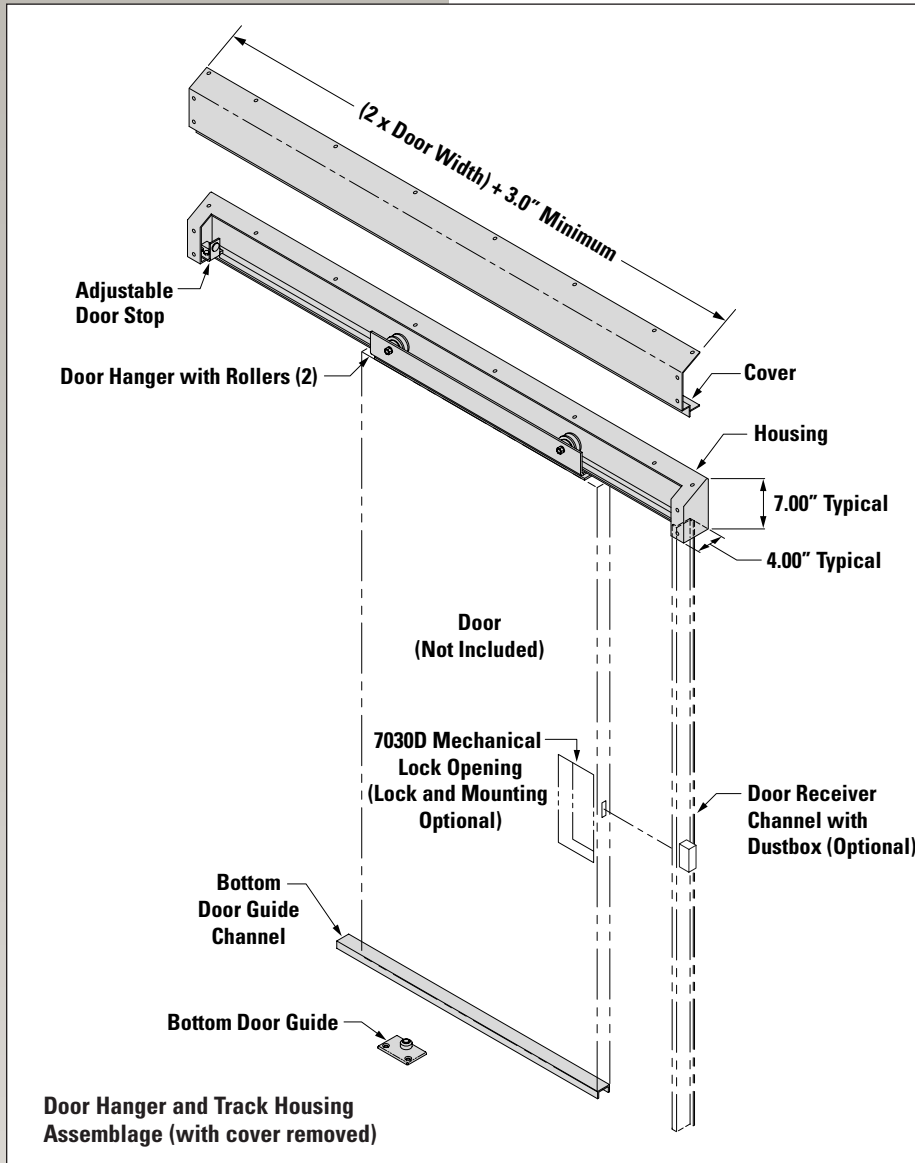

Standard Features

The 57100 assemblage consists of a sliding door hanger/roller assembly, track enclosure, and bottom guide built for durability and security. A typical application is for police station holding cell doors, often in combination with our 7030 mechanical or 5520 electromechanical locks.


- Construction features include:
7 gauge (3/16") steel track housing
10 gauge (1/8") steel removable housing cover
1/4" thick bent steel plate hanger
3/16" steel channel bottom guide
- Two rollers (2-3/4" diameter) turned from a solid steel bar, hardened and fitted with permanently lubricated steel ball bearings.
- Eccentric roller cams allow for vertical door adjustment.
- Door hanger and bottom guide are designed for welding to the door for optimal security.
- Bottom door guide channel completely conceals floor mounted roller assembly.
- Housing cover attached with security head fasteners.
- Standard housing accommodates door openings from 2'-0" to 3'-0" wide. Custom assemblies are available for doors wider than 3 feet.
- Adjustable heavy duty door bumper stops door movement in open position.
- Gray primer finish.

Optional Features


- Adjustable spring action door starter.
- A single pole (SPDT) or double pole (DPDT) door position switch.
- Adjustable shock absorber (HSA) cushions the door when slammed against receiver.
- Vertical door receiver channel.
- RRBS lock – see 7030 & 7030D mechanical and 5520 electromechanical locks.

Ordering Information

- Door Size (width x height x thickness)
- Door Construction (e.g. hollow metal, grille)
- Optional Features
- Consult factory with technical inquiries

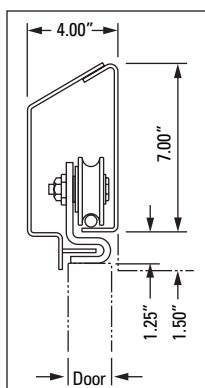

Typical Door Track and Hanger Profile

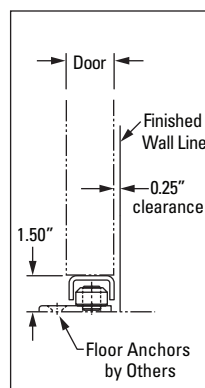

Bottom Door Guide