

DOOR POSITION SWITCHES FOR SWINGING DOORS

200MRS MAGNETIC SWITCH APPLICATION:

The 200MRS is used where a built-in door indicator switch is desired. This tamper-proof unit is mortised into the door frame. An actuating magnet is recessed into the door edge. Provided with security fasteners.

TECHNICAL DATA:

- SIZE: 4-7/8" L x 1-1/4" W
- WEIGHT: 1 lb.
- ELECTRICAL: 24 volts (AC or DC)

200MRS TB MAGNETIC SWITCH

Triple Bias Switch

220A DOOR POSITION SWITCH


APPLICATION:

The 220A switch actuates a remote lamp indicator or an audible signaling device the moment a swinging door is moved from the fully-closed position. Enclosed in a 10 gauge galvanized steel housing, the 220A is designed for installation on the door frame above the top hinge. A pivoting operator that actuates the switch is attached to the door face with special security screws. The 220A is designed for use on doors with 4-1/2" or 5" hinges. Specify hinge size and type (220A-5, 220A-4, etc.). Provided with security fasteners.

TECHNICAL DATA:

- SIZE: 6-5/16" x 2-1/2" x 1-7/8"
- WEIGHT: 3 lbs.
- ELECTRICAL: Switch rating
SPDT 15 amps at 125 VAC or
.5 amps at 125 VDC

200MRS MAGNETIC SWITCH

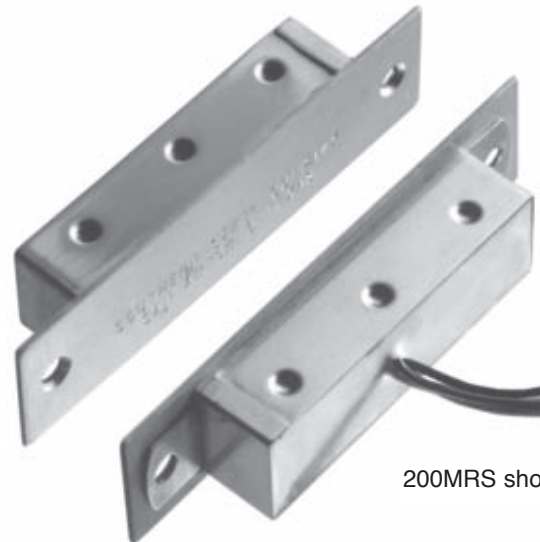

200MRS shown

220A DOOR POSITION SWITCH

