

# 205 HINGE

SF 205FS: FULL SURFACE HINGE  
SF 205G: GAP HINGE

## APPLICATION

Swinging doors at cells, corridors, plumbing chases, gates or other locations where a higher degree of security is required. Available in full surface or gap type configuration.

Leaf configuration can be any combination of solid leaf for weld-on or pre-drilled leaf for bolt-on.

Continuous non-removable hardened steel alloy pin. Smooth operating radial and thrust polymer bearings.

## TECHNICAL DATA

Size: 5"H x 4-1/2" W x 1/2" TK (FS)  
5"H x 6" W x 1/2" TK (GAP)  
Weight: 5 lbs.  
Pin Size: 5/8" diameter.  
Barrel Size: 1-1/2" diameter.  
Barrels/Leaves: Cold rolled steel.  
Finish: USP.

Exceeds all criteria for ASTM F1758 for detention hinges for Double Weight Grade 1.

Made in USA.

Weight capacity 800 pounds per weld-on hinge.



NOTE: These hinges are not direct replacements for the Folger Adam #5 Hinge or the Southern Steel 205 Hinge due to barrel size difference.

## SOUTHERN FOLGER 205 HINGE



SF 205G:  
GAP HINGE

SF 205FS:  
FULL SURFACE HINGE

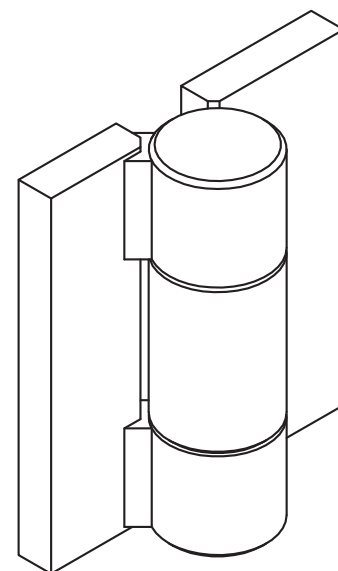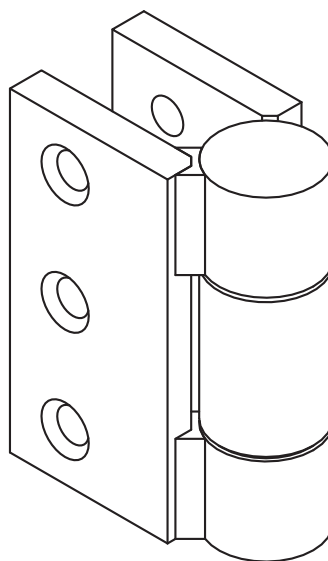

**Southern**  
 **Folger**