

FOOD PASS ASSEMBLY

262 FOOD PASS

APPLICATION:

For use in hollow metal or plate doors and walls. Opening area measures 5" H x 1' 3-1/4" W. Built-in stop positions the food pass door as a shelf when open. Key operated springlock provides positive security and prevents unauthorized use.

STANDARD FEATURES:



- 1017A snaplatch
- Two hinges

OPTIONAL FEATURES:


- 1010A deadlock
(Specify 262 x 1010A)
- 1010AM deadlock
(Specify 262 x 1010AM)
- 1017AM snaplatch
(Specify 262 x 1017AM)
- 1017AT snaplatch with thumbturn
only (Specify 262 x 1017AT)

TECHNICAL DATA:

- STANDARD FINISH: USP
- FRAME: 7 gauge mild steel
- LOCK: 1017A snaplatch
- HINGES: 3" H x 3" W x 5/32" TK
mild steel with cold-rolled
steel, non-removable pin
- FRAME SIZE:
1' 8-1/4" L x 10" W
- CLEAR OPENING:
5" H x 1' 3-1/4" W

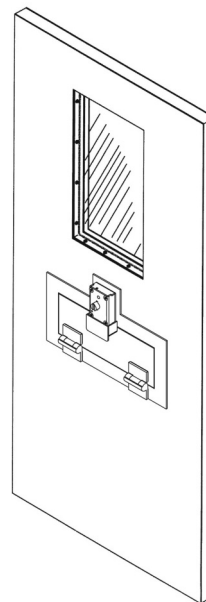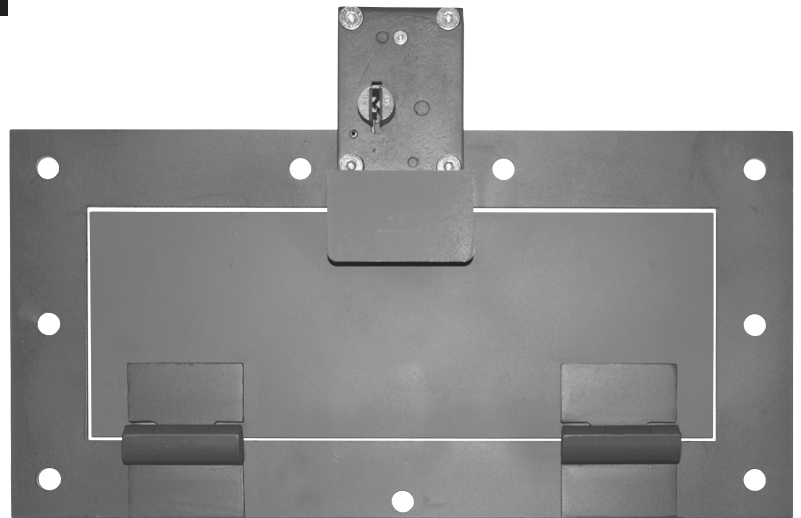

Paracentric

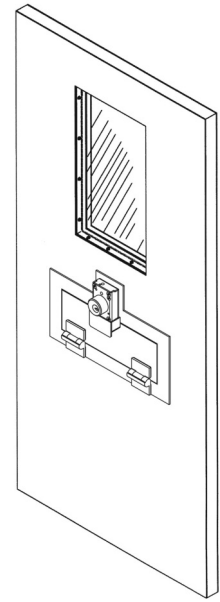

Mogul

